NST002 Door Stop Alarm Manual



INSTALLATION

- 1. Easy to install no wiring, make sure the on/off switch is in the "OFF" position.
- 2. Turn the unit upside down and open the battery compartment install one 9–volt battery noting polar (not included) and close the compartment.
- 3. The gap between door bottom and floor should be 1 3.5cm.
- 4. Place switch to the "ON" position to set up a defensive.
- 5. Low-battery indicator light, If you see the indicate LED always on, then need replace new battery.

IMPORTANT: Remove batteries before storing the Alarm for extended periods. Batteries corrode over time and may cause permanent damage to the unit. Different types of batteries or new and used batteries should not be mixed. Depleted batteries should be removed from the unit and disposed of properly.

OPERATION


- 1. To arm the unit, open the battery compartment at the back of unit, install 1pc 9V battery and close it. Sliding the power switch to the 'ON' position, place the pressure—sensitive door stop alarm at the base of any door, and the device will emit a powerful 120—decibel alarm when the door is opened and the alarm siren will sound continuously 60second.
- 2. LED blink every 4 seconds when switched ON.
- 3. To disarm the unit, toggle ON/OFF switch to "OFF" position, make sure the door is closed before rearing.

Note: To test, a cloth can be used to cover the alarm to reduce risk of hearing damage.

CARE AND MAINTENANCE

To clean the unit housing, use a soft cloth slightly dampened with water and wipe dry. Do not use chemical agents as this may damage and discolor the unit.

FOR INDOOR USE ONLY! DO NOT USE IN WET LOCATIONS!

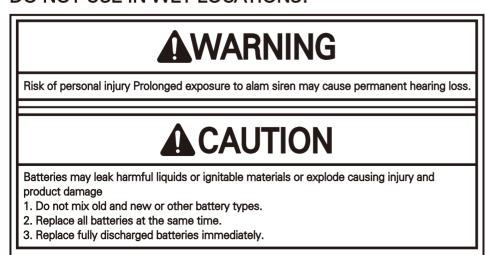

noahsales@sina.com Made in China